

RIGOL



MSO8000 Series Digital Oscilloscope

- Analog bandwidth: 600 MHz, 1 GHz, and 2 GHz (single-channel and half-channel modes)
- 4 analog channels, 1 EXT channel, and 16 standard configuration of digital channels (required to purchase the probe)
- Up to 10 GSa/s real-time sample rate
- Up to 500 Mpts memory depth (standard)
- High waveform capture rate (over 600,000 waveforms per second)
- Up to 450,000 frames of hardware real-time and ceaseless waveforms recording and playback functions
- Integrates 7 independent instruments into 1, including digital oscilloscope, 16-channel logic analyzer, spectrum analyzer, arbitrary waveform generator (option), digital voltmeter, 6-digit frequency counter and totalizer, and protocol analyzer (option)
- Auto measurement of 41 waveform parameters; full-memory hardware measurement function
- A variety of math operations, built-in enhanced FFT analysis, and peak search function
- Waveform histogram analysis (standard)
- Independent search, navigation keys, and event table
- Real-time eye diagram and jitter analysis software (option)
- Built-in advanced power analysis software (option)
- User-defined one-key quick operation
- 10.1-inch capacitive multi-touch screen, 256-level intensity grading display, with color persistence
- Multiple interfaces available: USB HOST&DEVICE, LAN(LXI), HDMI, TRIG OUT, and USB-GPIB
- Web Control remote command
- Unique online version upgrade
- Sophisticated and convenient industrial design, easy to operate

MSO8000 series is a medium and high-end mixed signal digital oscilloscope designed on the basis of the ASIC chip (RIGOL self-owns its intellectual property right) and UltraVision II technical platform developed by RIGOL. Integrating 7 independent instruments into one, the MSO8000 series is equipped with the analog bandwidth of up to 2 GHz, extremely high memory depth of 500 Mpts, sound waveform display effects, excellent waveform capture rate, and powerful data analysis functions. Many of its specifications have reached the top level in the industry. Meanwhile, it supports the real-time eye diagram measurement and jitter analysis. Its cost-effective features and high performance make it prominent as the 2 GHz mixed signal digital oscilloscope.

Design Features


► 7-in-1 Integrated Digital Oscilloscope, with Excellent Performance at Unprecedented Price Point



In today's integrated design field, a highly integrated comprehensive digital oscilloscope has become a useful tool for design engineers. The MSO8000 series digital oscilloscope launched by RIGOL this time integrates 7 independent instruments into 1, including one digital oscilloscope, one 16-channel logic analyzer, one spectrum analyzer, one arbitrary waveform generator, one digital voltmeter, one high-precision frequency counter and totalizer, and one protocol analyzer. The MSO8000 series offers you a flexible and economical solution to address your actual needs.

1. Digital Oscilloscope

- Three bandwidth models: 2 GHz, 1 GHz and 600 MHz; with the bandwidth upgradable
- Up to 10 GSa/s real-time sample rate
- 4 analog channels and 1 EXT channel
- Up to 500 Mpts memory depth
- Maximum waveform capture rate over 600,000 wfms/s
- Standard configuration of 500 MHz passive voltage probe for each channel
- Two 1.5 GHz passive low-impedance probes for the 2 GHz / 1 GHz bandwidth model

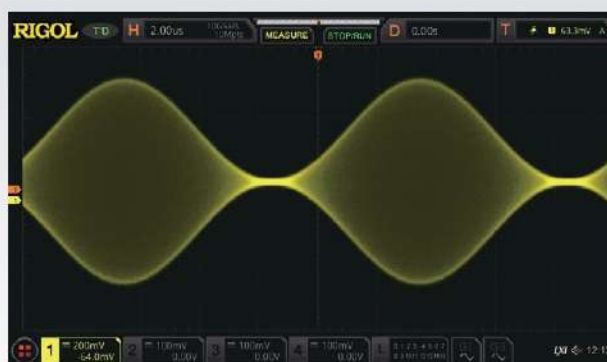


2. Logic Analyzer

- Standard configuration of 16 digital channels, optional configuration of one RPL2316 logic analyzer probe
- 62.5 Mpts memory depth for the waveforms of all the digital channels
- Up to 1.25 GSa/s sample rate
- Hardware real-time waveform recording and playback functions supported
- Mixed (analog channel and digital channel) trigger and decode supported
- Convenient digital channel grouping and group operation




3. Spectrum Analyzer

- Standard configuration of enhanced FFT, real-time operation for max. 1 Mpts waveform data
- Max. frequency range: oscilloscope analog bandwidth
- Up to 4 groups of operations can be displayed at the same time
- Independent FFT color persistence view supported
- Up to 15 peaks available for the peak search function; event table available to be exported

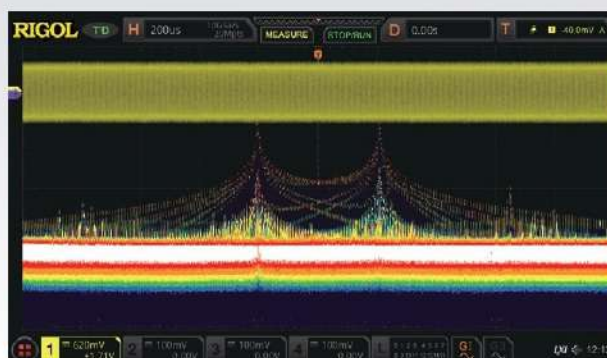


4.Arbitrary Waveform Generator (Option)

- Standard configuration of 2 waveforms output channels, and only the AWG option is required to be ordered
- 13 pre-defined waveforms
- Up to 25 MHz frequency
- Up to 200 MSa/s sample rate
- Advanced modulation, sweep, and burst signal output supported

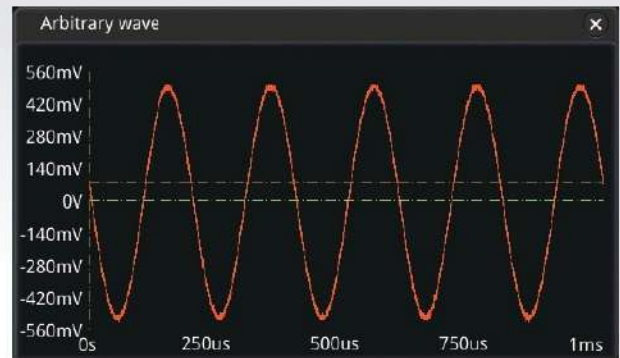

5.Digital Voltmeter

- 3-digit DC/AC RMS/AC+DC RMS voltage measurement
- Sound an alarm for reaching or exceeding the limits
- Display the latest measurement results in the form of a diagram, and display the extrema over the last 3 seconds

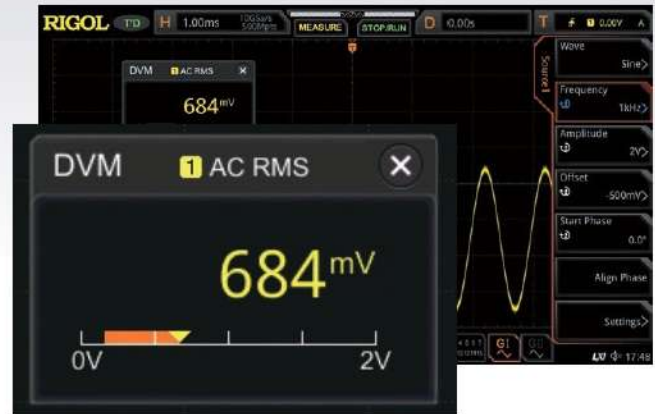

6.High-precision Frequency Counter and Totalizer

- 3 to 6-digit (selectable) high-precision frequency counter
- Support the statistics on the maximum and minimum values of the frequency
- 48-bit totalizer (standard)



7.Protocol Analyzer (Option)

- Support RS232/UART, I2C, SPI, CAN, LIN, I2S, FlexRay, and MIL-STD-1553 serial bus
- Support the protocol trigger and decoding for the analog channel and the digital channel
- RS232/UART, I2C, and SPI protocols support the waveform search function
- Capable of working with the waveform recording, pass/fail test, and zone trigger



► 600,000 wfms/s Capture Rate

Engineers often have to spend a lot of time and efforts in locating the problem in design and debugging. Therefore, a proper debugging tool will help engineers to work more efficiently. MSO8000 series digital oscilloscope can provide the waveform capture rate of up to 600,000 wfms/s, so that the glitches and infrequent events in waveforms can be quickly identified, greatly improving the debugging efficiency for the engineers.

256-level intensity grading display can reflect the occurrence frequencies of the infrequent events. Its newly added color persistence function can highlight the signal of different probabilities with a different color grading. You can set the persistence time to control the duration time for the waveforms to be displayed on the screen, so that the display capability of the infrequent events can be further enhanced.



Capture occasional exceptional signals in a highly refreshed mode.



Changes of each frame of waveforms of the sweep signal can be clearly observed in the highly refreshed mode.

► Hardware Full Memory Auto Measurement

The auto measurement is the basic tool for engineers to make a rapid analysis of the signals, and it requires more efficient measurement process and accurate measurement results. MSO8000 supports hardware full memory auto measurement, provides measurements of 41 waveform parameters, supports displaying the statistics and analysis of the measurement results for 10 items. In addition, the auto measurement function also supports auto cursor indicator and measurement range selection. You can also set the threshold for each measurement source independently, making the waveform measurement more flexible.

Based on the different data sources, auto measurement consists of two modes: Normal and Precision. In Normal mode, the data volume increases from 1 k to 1 M, realizing the optimization of the basic measurement function. In Precision mode, the oscilloscope provides hardware full-memory auto measurement, greatly improving the precision of the waveform measurement. With the 500 Mpts memory depth, any measurement for the item can be completed within 1.5s, addressing the issue of long observation of the signal for measurement perfectly.



Observe and accurately measure two signals with great frequency deviations. The full-memory hardware measurement can measure accurate frequency value of the waveforms with 340k rising edges.



The ordinary 1 Mpts software measurement can no longer measure the accurate frequency of the high-frequency signal.

► Hardware Waveform Recording and Playback


The memory depth is one of the key specifications of the oscilloscope. However, whatever high the memory depth, it cannot be guaranteed that all the signals that users are concerned about can be captured in one time. This is especially true for the occurrence of the infrequent signals during debugging design or locating specific events from the long captured complicated signals. In addition, the long memory depth will be bound to reduce the response time for the oscilloscope. The hardware waveform recording and playback function can address this issue.

The MSO8000 series provides ceaseless recording and playback for a maximum of 450,000 frames of hardware real-time waveforms. This specification is second to none in the industry. The hardware waveform recording function adopts the segmented storage technology. With the technology, you can set the trigger conditions to make a selective choice in capturing and saving the signals that you are interested in, then mark the time on the signal. This has not only ensured the high capture efficiency, but also prolonged the overall observation time for the waveforms. The hardware waveform playback function enables you to have sufficient time to take a careful view and analysis of the recorded segment of the waveforms.



► Hardware Pass/Fail Test

The MSO8000 series is equipped with hardware pass/fail test function as the standard configuration, which can be used in signal monitoring for a long time, signal monitoring during design, and signal test in the production line. You can set the test mask based on the known "standard" waveform, and then compare the signal under test with the "standard" waveform to display the statistics on the test results. When a successful or failed test is detected by the oscilloscope, you can choose to immediately stop monitoring, enable the beeper to sound an alarm, or save the current screen image. Also, you can choose to continue monitoring.

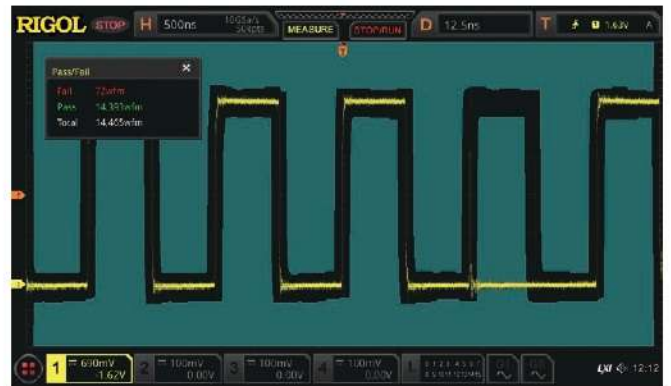

The Pass/Fail test function can quickly make a statistics on the occurrence probability of the signal exceptions.

► Zone Trigger

In face of the complex and variable circuit signal in the circuit debugging, it is easy for us to find the transient occasional exception signals on the oscilloscope with a high waveform capture rate. However, it is not easy to isolate the exceptional signal from the complex circuit signals and trigger them stably. You have to spend more time on the usage of some advanced trigger types, and sometimes even the powerful advanced trigger is unable to make it. The MSO8000 series is specially equipped with touch screen-based zone trigger function, which can help users accelerate the signal isolation process. The zone trigger function is easy to operate. You only need to use the specified rectangle drawing gesture to draw one or two rectangular zones on the corresponding signal section, then you can quickly isolate the signal for observation.

The zone trigger can work with other 20 trigger types, and it also supports the decoding, waveform recording, and pass/fail test functions. This is conducive to the debugging of the complex signals.




Draw a rectangle on the transient exception signal and select Trigger zone B.



Quickly isolate the exceptional signal with Edge trigger and Zone trigger.

► Search and Navigation

As the memory depth of the oscilloscope becomes higher, locating a specific event from the thousands of captured complicated waveforms is a tedious task that requires much time and efforts. The waveform search function can help you quickly locate the concerned events and make a mark. Then, you can use the specific navigation keys to quickly locate the marked signal and make measurements easily. The search conditions for waveform search include edge, pulse, runt pulse, and slope. The searched event information is displayed in the form of a list.

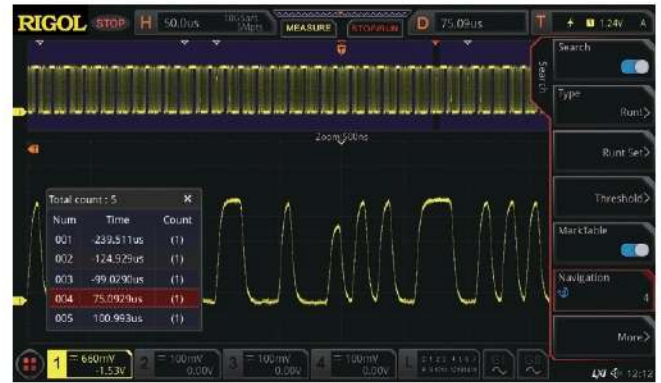

The search and navigation function can quickly search for the signals with exceptions and locate them accurately.

► Power Analysis (Option)

To cater to the increasing test demand for the switch power supply and the power component, we configure the MSO8000 series with the optional built-in power analysis software. The current power analysis software can complete the power quality analysis and ripple analysis, helping engineers analyze the commonly used power parameters rapidly and accurately, without needing to make tedious configurations manually or do complicated formula calculation.




► Remote Control and Offline Analysis Software

The Web Control software and Ultra Scope control analysis software are served as the standard configurations for the MSO8000 series. You can use them to migrate the instrument control and waveform analysis to the PC, and then click the mouse to operate easily.

You only need to input the IP address of the oscilloscope into the address bar of the Web browser to open the Web Control software. The display of the waveform interface and instrument control in the software are consistent with that in the MSO8000 series. You can use the mouse to tap the keys or knobs in the Web Control interface to complete the waveform control, measurement, and analysis. In the Web Control interface, the basic information of the instrument is displayed, and you can also upload or download the files of the oscilloscope, control with the SCPI commands, set or modify the network status.

The powerful data analysis function of the MSO8000 series is not only limited to the oscilloscope itself. The Ultra Scope control analysis software can not only realize the basic control for the instrument, but also can export the 500 M waveform big data to the PC, and then make measurements, math operation, and analysis of the data offline. It also supports real-time monitoring of the oscilloscope status and display in multiple windows with multiple instruments. The available remote control interfaces include USB, LAN, and GPIB, and you can select any one of them to realize remote control.

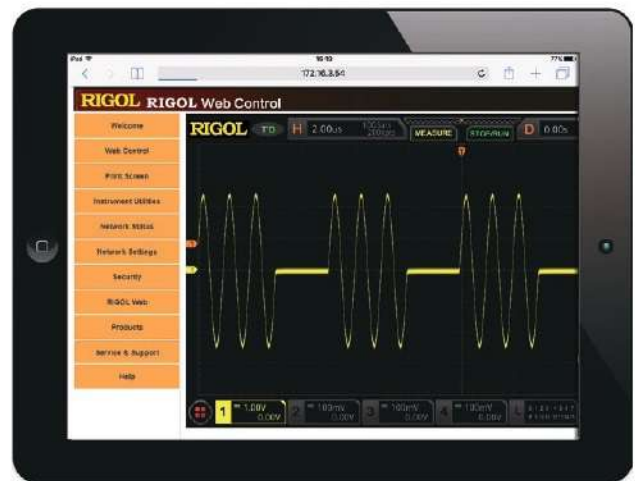

► User-defined One-key Quick Operation

There is a dedicated Quick key on the front panel of the MSO8000 series, enabling you to customize the function of the key and complete the commonly used operation quickly. With the customized setting of the Quick key, you can quickly capture the screen image, realize waveform saving, setup saving, all measurement, reset measurement statistics, reset pass/fail test statistics, record waveforms, send emails, printing, group saving, and etc.



► Multiple External Interfaces

The MSO8000 series provides a variety of external interfaces, including USB HOST&DEVICE, LAN(LXI), HDMI, TRIG OUT, and USB-GPIB (option). The oscilloscope is in compliance with the standards specified in LXI Device Specification 2011. It can access to the LXI web page via the LAN interface. You can purchase the USB-GPIB interface converter from RIGOL to enjoy the reliable GPIB communication service. The available HDMI video output interface is also supported.



Specifications

All the specifications are guaranteed except the parameters marked with "Typical" and the oscilloscope needs to operate for more than 30 minutes under the specified operation temperature.

Overview of the MSO8000 Series Technical Specifications

Model	MSO8064	MSO8104	MSO8204
Analog Bandwidth (50 Ω, -3 dB) ^[1]	600 MHz	1 GHz	2 GHz
Analog Bandwidth (1 MΩ, -3 dB)		500 MHz	
Calculated Rising Time under 50 Ω (single-channel mode, 10%-90%, typical)	≤583 ps	≤350 ps	≤175 ps
No. of Input/Output Channels	4 input analog channels		
	1 input EXT channel		
	16 input digital channels (required to purchase the RPL2316 logic analyzer probe)		
	dual-channel arbitrary waveform generator output (required to purchase the MSO8000-AWG option)		
Sampling Mode	real-time sampling		
Max. Sample Rate of Analog Channel	10 GSa/s (single-channel), 5 GSa/s (half-channel ^[2]), 2.5 GSa/s (all channels) Note: When all the channels are enabled, the sample rate is 2.5 GSa/s, and the analog bandwidth can reach up to 1 GHz.		
Max. Memory Depth	analog channel: 500 Mpts (single-channel), 250 Mpts (half-channel ^[2]), 125 Mpts (all channels) digital channel: 62.5 Mpts (all channels)		
Max. Waveform Capture Rate ^[3]	≥600,000 wfms/s		
Hardware real-time waveform recording and playing	≥450,000 wfms (single-channel)		
Peak Detection	capture 400 ps glitches		
LCD Size and Type	10.1-inch capacitive multi-touch screen/gesture enabled operation		
Display Resolution	1024 × 600		

Vertical System Analog Channel

Vertical System Analog Channel	
Input Coupling	DC or AC
Input Impedance	1 MΩ ± 1%, 50 Ω ± 1%
Input Capacitance	19 pF ± 3 pF
Probe Attenuation Coefficient	0.0001X, 0.0002X, 0.0005X, 0.001X, 0.002X, 0.005X, 0.01X, 0.02X, 0.05X, 0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X, 20X, 50X, 100X, 200X, 500X, 1000X, 2000X, 5000X, 10000X, 20000X, and 50000X
Probe Recognition	auto-recognized RIGOL probe
Maximum Input Voltage	1 MΩ CAT I 300 Vrms, 400 Vpk, Transient Overvoltage 1600 Vpk 50 Ω 5 Vrms
Vertical Resolution	8 bits
Vertical Sensitivity Range ^[4]	1 MΩ 1 mV/div ~ 10 V/div 50 Ω 1 mV/div ~ 1 V/div
Offset Range	1 MΩ ± 1 V (1 mV/div ~ 50 mV/div) ± 30 V (51 mV/div ~ 260 mV/div) ± 100 V (265 mV/div ~ 10 V/div)
	50 Ω ± 1 V (1 mV/div ~ 100 mV/div) ± 4 V (102 mV/div ~ 1 V/div)
Dynamic Range	±5 div (8 bits)
Bandwidth Limit (Typical)	1 MΩ 20 MHz, 250 MHz; selectable for each channel 50 Ω 20 MHz
DC Gain Accuracy ^[4]	± 2% of full scale
DC Offset Accuracy	≤200 mV/div (±0.1 div ±2 mV ±1.5% of offset value) >200 mV/div (±0.1 div ±2 mV ±1.0% of offset value)

Channel-to-Channel Isolation	$\geq 100:1$ (DC to 1 GHz), $\geq 30:1$ (> 1 GHz to the rated bandwidth)
ESD Tolerance	± 8 kV (on input BNCs)

Vertical System Digital Channel

Vertical System Digital Channel	
Number of Channels	16 input channels (D0 ~ D15) (D0 ~ D7, D8 ~ D15)
Threshold Range	± 20.0 V, in 10 mV step
Threshold Accuracy	$\pm (100$ mV + 3% of the threshold setting)
Threshold Selection	TTL(1.4 V), CMOS5.0(2.5 V), CMOS3.3(1.65 V), CMOS2.5(1.25 V), CMOS1.8(0.9 V), ECL(-1.3 V), PECL(3.7 V), LVDS(1.2 V), and 0.0V User (adjustable threshold for 8 channels in a group)
Max. Input Voltage	± 40 V peak CAT I; transient overvoltage 800 Vpk
Max. Input Dynamic Range	± 10 V + threshold
Minimum Voltage Swing	500 mVpp
Input Impedance	about 101 k Ω
Probe Load	≈ 8 pF
Vertical Resolution	1 bit

Horizontal System--Analog Channel

Horizontal System--Analog Channel			
Range of Time Base	600 MHz 500 ps/div~1 ks/div support fine adjustment	1 GHz 500 ps/div~1 ks/div	2 GHz 200 ps/div~1 ks/div
Time Base Resolution	2 ps		
Time Base Accuracy	± 1 ppm ± 2 ppm/year		
Time Base	before triggering	$\geq 1/2$ screen width	
Delay Range	after triggering	1 s to 100 div	
Time Interval (ΔT) Measurement	$\pm (1$ sample interval) $\pm (2$ ppm \times readout) ± 50 ps		
Inter-channel Offset Correction Range	± 100 ns		
	YT	Default	
	XY	X = Channel 1, Y = Channel 2	
Horizontal Mode	SCAN	Time base ≥ 200 ms/div, available to enter or exit the SCAN mode by rotating the Horizontal SCALE knob	
	ROLL	Time base ≥ 200 ms/div, available to enter or exit the ROLL mode ^[5] by rotating the Horizontal SCALE knob	

Horizontal System--Digital Channel

Horizontal System--Digital Channel	
Min. Detectable Pulse Width	3.2 ns
Maximum Input Frequency	500 MHz (accurately copied as the sine wave of the maximum frequency of the logic square wave; input amplitude is the minimum swing; the shortest ground cable is required for the logic probe)
Inter-channel Time Delay	1 ns (typical), 2 ns (maximum)

Acquisition System

Acquisition System	
Max. Sample Rate of Analog Channel	10 GSa/s (single-channel), 5 GSa/s (half-channel ^[2]), 2.5 GSa/s (all channels) Note: When all the channels are enabled, the sample rate is 2.5 GSa/s, and the maximum analog bandwidth can only reach up to 1 GHz.
Max. Memory Depth of Analog Channel	500 Mpts (single-channel), 250 Mpts (half-channel ^[2]), 125 Mpts (all channels)
Max. Sample Rate of Digital Channel	1.25 GSa/s (all channels)
Max. Memory Depth of Digital Channel	62.5 Mpts (all channels)

	Normal	Default
Acquisition Mode	Peak Detection	capture 400 ps glitches
	Average Mode	2, 4, 8, 16...65536 are available for you to choose, averaging point by point
	High Resolution	12 bits

Trigger System

Trigger System		
Trigger Source	Analog channel (1 ~ 4), Digital channel (D0 ~ D15), EXT TRIG, and AC Line	
Trigger Mode	Auto, Normal, Single	
Trigger Coupling	DC	DC coupling trigger
	AC	AC coupling trigger
	High Frequency Rejection	High frequency rejection, cut-off frequency ~ 75 kHz (internal only)
	Low Frequency Rejection	Low frequency rejection, cut-off frequency ~ 75 kHz (internal only)
Noise Rejection	increase delay for the trigger circuit (internal only), On/Off	
Holdoff Range	8 ns to 10 s	
Trigger Bandwidth	Internal: analog bandwidth of the oscilloscope	
	External: 200 MHz	
Trigger Sensitivity (Internal)	1 div, <10 mV/div 0.6 div, 10 mV/div ~ 19.8 mV/div 0.4 div, 20 mV/div ~ 49.5 mV/div 0.35 div, ≥50 mV/div When the noise rejection is enabled, the trigger sensitivity is reduced half	
Trigger Sensitivity (External)	200 mVpp, DC ~ 100 MHz 500 mVpp, 100 MHz ~ 200 MHz	
Trigger Level Range	Internal:	± 5 div from the center of the screen
	External	± 8 V
	AC Line	fixed 50%

Trigger Type

Trigger Type	
Zone Trigger	Trigger in the rectangle area drawn manually, supporting trigger zone A and trigger zone B. The trigger conditions can be "Intersect" or "Not intersect" Source channel: CH1~CH4; only one analog channel is triggered each time
Trigger Type	Standard: Edge trigger, Pulse trigger, Slope trigger, Video trigger, Pattern trigger, Duration trigger, Timeout trigger, Runt trigger, Window trigger, Delay trigger, Setup/Hold trigger, and Nth Edge trigger Option: RS232, UART, I2C, SPI, CAN, FlexRay, LIN, I2S, and MIL-STD-1553
Edge	Trigger on the threshold of the specified edge of the input signal. The edge types can be Rising, Falling, or Either Source channel: CH1 ~ CH4, D0 ~ D15, EXT, or AC Line
Pulse	Trigger on the positive or negative pulse with a specified width. The pulse width is greater or smaller than a certain value or within a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Slope	Trigger on the positive or negative slope of the specified time (800 ps~10 s). The slew time is greater or smaller than a certain value or within a certain time range Source channel: CH1~CH4
Video	Trigger on all lines, specified line, odd field, or even field that conforms to the video standards. The supported video standards include NTSC, PAL/SECAM, 480p/60Hz, 576p/50Hz, 720p/60Hz, 720p/50Hz, 720p/30Hz, 720p/25Hz, 720p/24Hz, 1080p/60Hz, 1080p/50Hz, 1080p/30Hz, 1080p/25Hz, 1080p/24Hz, 1080i/60Hz, and 1080i/50Hz Source channel: CH1~CH4
Pattern	Identify a trigger condition by searching for a specified pattern. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X, Rising, or Falling Source channel: CH1 ~ CH4, D0 ~ D15
Duration	Trigger when the specified pattern meets the specified duration condition. The pattern is a combination of multiple selected channel sources. The logic pattern of each channel is H, L, X. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Timeout	Trigger when duration of a certain event exceeds the specified time (16 ns~10 s). The event can be specified as Rising, Falling, or Either Source channel: CH1~CH4, D0~D15

Runt	Trigger when the pulses pass through one threshold but fail to pass through another threshold. Only analog channels are supported Source channel: CH1~CH4
Window	Trigger in a specified window state when the rising edge of the signal crosses the upper threshold or the falling edge crosses the lower threshold. The window state can be Enter, Exit, or Time Source channel: CH1~CH4
Delay	Trigger when the time difference between the specified edges of Source A and Source B meets the preset time. The duration is greater or smaller than a certain value, or within a certain time range, or outside a certain time range Source channel: CH1 ~ CH4, D0 ~ D15
Setup/Hold	When the setup time or hold time between the input clock signal and the data signal is smaller than the specified time (8 ns~1 s) Source channel: CH1~CH4, D0~D15
Nth Edge	Trigger on the Nth edge that appears after the specified idle time. The edge can be specified as Rising or Falling Source channel: CH1 ~ CH4, D0 ~ D15
RS232/UART (Option)	MSO8000-COMP option Trigger on the Start, Error, Check Error, or Data frame of the RS232/UART bus (up to 20Mb/s) Source channel: CH1~CH4, D0~D15
I2C (Option)	MSO8000-EMBD option Trigger on the Start, Stop, Restart, MissedACK, Address (7 bits, 8 bits, or 10 bits), Data, or Address Data of the I2C bus Source channel: CH1 ~ CH4, D0 ~ D15
SPI (Option)	MSO8000-EMBD option Trigger on the specified pattern of the specified data width (4 ~ 32) of SPI bus. CS and Timeout are supported Source channel: CH1 ~ CH4, D0 ~ D15
CAN (Option)	MSO8000-AUTO option Trigger on the start of a frame, end of a frame, Remote ID, Overload, Frame ID, Frame Data, Data&ID, Frame Error, Answer Error, Check Error, Format Error, Bit Fill, and Random of the CAN signal (up to 5Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF Source channel: CH1 ~ CH4, D0 ~ D15
FlexRay (Option)	MSO8000-FLEX option Trigger on the specified position (TSS End, FSS_BSS End, FES End and DTS End), frame (null, Syn, Start and All), symbol (CAS/MTS and WUS), error (Head CRC Err, Tail CRC Err, Decode Err, and Random Err) of the FlexRay signal (up to 10 Mb/s) Source channel: CH1 ~ CH4, D0 ~ D15
LIN (Option)	MSO8000-AUTO option Trigger on the Sync, ID, Data (length settable), Data&ID, Wakeup, Sleep, and Error of the LIN bus signal (up to 20 Mb/s). Source channel: CH1~CH4, D0~D15
I2S (Option)	MSO8000-AUDIO option Trigger on 2's complement data of audio left channel, right channel, or either channel (=, ≠, >, <, <>, ><). The available alignment modes include I2S, LJ, and RJ. Source channel: CH1~CH4, D0~D15
MIL-STD-1553 (Option)	MSO8000-AERO option Trigger on Sync (Data Sync, Cmd/Status Sync, and All Sync), Data, RTA, RTA+11Bit, and Error (Sync Error and Check Error) of the MIL-STD-1553 bus. Source channel: CH1~CH4

Search and Navigation

Search, Navigation, and Table	
Type	Edge, Pulse, Runt, Slope, RS232, I2C and SPI
Source	Any analog channel
Copy	Copy the search settings to the trigger settings, and copy from the trigger settings
Result Display	Event table or navigation. Go to the specific event through the event table index
Navigation	Memory playing: view the memory waveforms with the navigation keys by scrolling through stored waveform data, supporting viewing at three speeds
	ZOOM playing: view the details of waveforms with the navigation keys by panning the ZOOM window automatically, supporting viewing at three speeds
	Recording playback: play back the recorded waveforms with the navigation keys
	Event navigation: use the navigation keys to scroll through the event search results

Waveform Measurement

Waveform Measurement		
Cursor	Number of Cursors	2 pairs of XY cursors
	Manual Mode	Voltage deviation between cursors (ΔY) Time deviation between cursors (ΔX) Reciprocal of ΔX (Hz) ($1/\Delta X$)
	Track Mode	Fix Y-axis to track X-axis waveform point's voltage and time values Fix X-axis to track Y-axis waveform point's voltage and time values
	Auto Measurement	Allows to display cursors during auto measurement
	XY Mode	Measures the voltage parameters of the corresponding channel waveforms in XY time base mode. X = Channel 1, Y = Channel 2
Auto Measurement	Number of Measurements	41 auto measurements; and up to 10 measurements can be displayed at a time
	Measurement Source	CH1~CH4, Math1~Math4, and D0~D15
	Measurement Mode	Normal and Precision (full-memory hardware measurement)
	Measurement Range	Main, Zoom, and Cursor
	All Measurement	Display 33 measurement items for the current measurement channel; the measurement results are updated continuously; you can switch the measurement channel
	Vertical	Vmax, Vmin, Vpp, Vtop, Vbase, Vamp, Vupper, Vmid, Vlower, Vavg, VRMS, Per. VRMS, Overshoot, Preshoot, Area, Period Area, and Std Dev
	Horizontal	Period, Frequency, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Positive Pulse Count, Negative Pulse Count, Rising Edge Count, Falling Edge Count, T _{vmax} , T _{vmin} , +Slew Rate, and -Slew Rate
	Others	Delay(A \uparrow - B \uparrow), Delay(A \uparrow - B \downarrow), Delay(A \downarrow - B \uparrow), Delay(A \downarrow - B \downarrow), Phase(A \uparrow - B \uparrow), Phase(A \uparrow - B \downarrow), Phase(A \downarrow - B \uparrow), and Phase(A \downarrow - B \downarrow)
Analysis	Frequency counter, DVM, power analysis (option), histogram, zone trigger, eye analysis (option), and jitter analysis (option)	
Statistics	Current, Average, Max, Min, Standard Deviation, Count Statistical times settable	

Waveform Calculation

Waveform Calculation		
No. of Math Functions	4; 4 math functions available to be displayed at a time	
Operation	A+B, A-B, A×B, A/B, FFT, A&&B, A B, A^B, !A, Intg, Diff, Lg, Ln, Exp, Sqrt, Abs, AX+B, LowPass, HighPass, BandPass, BandStop, and Trend	
Color Grade	Supporting Math and FFT	
Enhanced FFT	Record Length	Max. 1 Mpts
	Window Type	Rectangular, Blackman-Harris, Hanning(default), Hamming, Flattop, and Triangle
	Peak Search	A maximum of 15 peaks, confirmed by the settable threshold and offset threshold set by users

Waveform Analysis

Waveform Analysis		
Waveform Recording		Store the signal under test in segments according to the trigger events, i.g. save all the sampled waveform data as a segment to the RAM for each trigger event. The maximum number of the sampled segments reaches 450,000.
	Source	All enabled analog channels and digital channels
	Analysis	Support playing frame by frame or continuous playing; capable of calculating, measuring, and decoding the played waveforms
Pass/Fail Test		Compare the signal under test with the user-defined mask to provide the test results: the number of successful tests, failed tests, and the total number of tests. The pass/fail event can enable immediate stop, beeper, and the screenshot
	Source	Any analog channel

Histogram		The waveform histogram provides a group of data, showing the number of times a waveform hits within the defined region range on the screen. The waveform histogram not only shows the distribution of hits, but also the ordinary measurement statistics
	Source	Any analog channel, auto measurement item, or jitter measurement
	Type	Horizontal, vertical, measurement, or jitter measurement
	Measure	sum, peak, max, min, pKpk, mean, median, mode, bin width, and sigma
Color Grade	Mode	Support all modes, except the Zoom, XY, and ROLL modes
		Provide a dimensional view for color grade waveforms
	Source	Any analog channel
	Color Theme	Temperature and intensity
Real-time Eye Diagram (JITTER Option)	Mode	Support all modes
		Provide the eye display based on the recovered clock period by acquiring the fixed length of data to make successive and superimposing display in color persistence form.
	Source	Any analog channel
	Clock Recovery	Constant clock, first-order PLL, second-order PLL, and explicit clock
Jitter Analysis (JITTER Option)	Data Rate	Fully automatic, semi automatic, and manual
	Eye Measurement Item	One level, zero level, eye height, eye width, eye amplitude, crossing percentage, and Q Factor
		Make measurements for the clock or data signal over time, analyze the variance of the technical specifications.
	Source	Any analog channel
Jitter Analysis (JITTER Option)	Clock Recovery	Constant clock, first-order PLL, second-order PLL, and explicit clock
	Data Rate	Fully automatic, semi automatic, and manual
	Jitter Measurement	TIE, Cycle to Cycle, +Width to +Width, and -Width to -Width
	Measurement Display	Meas trend, meas histogram

Serial Decoding

Serial Decoding	
Number of Decodings	4, four protocol types can be supported at the same time
Decoding Type	Standard: Parallel Option: RS232, UART, I2C, SPI, LIN, CAN, FlexRay, I2S, and MIL-STD-1553
Parallel	Up to 20 bits of Parallel decoding, supporting the combination of any analog channel and digital channel. Support user-defined clock and auto clock settings Source channel: CH1 ~ CH4, D0 ~ D15
RS232/UART	MSO8000-COMP option Decode the RS232/UART (up to 20 Mb/s) bus's TX/RX data (5-9 bits), parity (Odd, Even, or None), and stop bits (1-2 bits) Source channel: CH1~CH4, D0~D15
I2C	MSO8000-EMBD option Decode the address (with or without the R/W bit) of the I2C bus, data, and ACK. Source channel: CH1~CH4, D0~D15
SPI	MSO8000-EMBD option Decode the MISO/MOSI data (4-32 bits) of the SPI bus. The available mode includes "Timeout" and "CS". Source channel: CH1~CH4, D0~D15
LIN	MSO8000-AUTO option Decode the protocol version (1.X or 2.X) of the LIN bus (up to 20 Mb/s). The decoding displays sync, ID, data, and check sum. Source channel: CH1~CH4, D0~D15
CAN	MSO8000-AUTO option Decode the remote frame (ID, byte number, CRC), overload frame, and data frame (standard/extended ID, control domain, data domain, CRC, and ACK) of the CAN bus (up to 5 Mb/s). The supported CAN bus signal types include CAN_H, CAN_L, TX/RX, and DIFF. Source channel: CH1~CH4, D0~D15
FlexRay	MSO8000-FLEX option Decode the frame ID, PL (payload), Header CRC, Cycle Count, Data, Tail CRC, and DTS of the FlexRay bus (up to 10 Mb/s). The supported signal types include BP, BM, and RX/TX. Source channel: CH1~CH4, D0~D15

I2S	MSO8000-AUDIO option Decode I2S audio bus left channel data and right channel data, supporting 4-32 bits. The alignment modes include I2S, LJ, and RJ. Source channel: CH1~CH4, D0~D15
MIL-STD-1553	MSO8000-AERO option Decode the MIL-STD-1553 bus signal's data word, command word, and status word (address+last 11 bits) Source channel: CH1 ~ CH4

Auto

Auto	
AutoScale	Min voltage greater than 10 mVpp, duty cycle 1%, frequency over 35 Hz

Arbitrary Waveform Generator

Arbitrary Waveform Generator (technical specifications are typical values) (option)		
Number of Channels	2	
Output Mode	normal (2-channel output)	
Sample Rate	200 MSa/s	
Vertical Resolution	14 bits	
Max. Frequency	25 MHz	
Standard Waveform	Sine, Square, Ramp, Pulse, DC, Noise	
Built-in Waveform	Sinc, Exp.Rise, Exp.Fall, ECG, Gauss, Lorentz, and Haversine	
Sine	Frequency Range	100 mHz to 25 MHz
	Flatness	± 0.5 dB (relative to 1 kHz)
	Harmonic Distortion	-40 dBc
	Spurious (non-harmonics)	-40 dBc
	Total Harmonic Distortion	1%
	S/N Ratio	40 dB
Square/Pulse	Frequency Range	Square: 100 mHz to 15 MHz Pulse: 100 mHz to 1 MHz
	Rise/Fall Time	<15 ns
	Overshoot	<5%
	Duty	Square: always be 50% Pulse: 10% to 90%, adjustable
	Duty Cycle Resolution	1% or 10 ns (whichever is greater)
	Min. Pulse Width	20 ns
	Pulse Width Resolution	5 ns
Ramp	Jitter	5 ns
	Frequency Range	100 mHz to 100 kHz
	Linearity	1%
Noise	Symmetry	1% to 100%
	Bandwidth	>25 MHz
Built-in Waveform	Frequency Range	100 mHz to 1 MHz
	Frequency Range	100 mHz to 10 MHz
Arbitrary Waveform	Waveform Length	2 ~ 16 kpts
	support loading channel waveforms and stored waveforms	
Frequency	Accuracy	100 ppm (<10 kHz), 50 ppm (>10 kHz)
	Resolution	100 mHz or 4 bits (whichever is greater)
Amplitude	Output Range	20 mVpp ~ 5 Vpp (HighZ), 10 mVpp ~ 2.5 Vpp (50 Ω)
	Resolution	100 μ V or 3 bits (whichever is greater)
	Accuracy	\pm (2% of setting+1 mV) (Frequency=1 kHz)
DC Offset	Range	\pm 2.5 V (HighZ), \pm 1.25 V (50 Ω)
	Resolution	100 μ V or 3 bits (whichever is greater)
	Accuracy	\pm (2% of offset setting+5 mV+0.5% of amplitude)

	AM, FM, FSK	
Modulation	AM	Modulating Waveforms: Sine, Square, Triangle, and Noise. Modulation Frequency: 1 Hz to 50 kHz Modulation Depth: 0% to 120%
	FM	Modulating Waveforms: Sine, Square, Triangle, and Noise. Modulation Frequency: 1 Hz to 50 kHz Modulation Offset: 1 Hz to carrier frequency
	FSK	Modulating Waveforms: 50% duty cycle square Modulation Frequency: 1 Hz to 50 kHz Hopping Frequency: 100 mHz to max. carrier frequency
Sweep	Linear, Log, and Step Sweep Time	1 ms to 500 s
	Start Frequency and End Frequency	Any frequencies within the waveform range
Burst	N Cycle, Infinite	
	Cycle Count	1 to 1000000
	Burst Period	1 μ s to 500 s
	Burst Delay	0 s to 500 s
	Trigger Source	Internal, Manual

Digital Voltmeter

Digital Voltmeter (technical specifications are typical values)	
Source	Any analog channel
Function	DC, AC+DC RMS, and AC RMS
Resolution	ACV/DCV: 3 bits
Limits Beeper	Sound an alarm when the voltage value is within or outside of the limit range.
Range Measurement	Display the latest measurement results in the form of a diagram, and display the extrema over the last 3 seconds

High-precision Frequency Counter

High-precision Frequency Counter		
Source	Any analog channel, digital channel, and EXT	
Measure	Frequency, period, totalizer	
Counter	Resolution	Max. 6 bits, user-defined
	Max. Frequency	Max. analog bandwidth or 1.2 GHz (whichever is less)
Totalizer		48-bit totalizer
	Edge	Count the number of the rising edges
Time Reference	Internal Reference	

Customization for Quick Key

Customization for Quick Key	
Quick Screenshot	Quickly save the screen image to the specified path based on the current image storage menu settings
Quick Waveform Save	Quickly save the screen or memory waveforms to the specified path based on the current waveform storage menu settings
Quick Setup Save	Quickly save the setup file to the specified path based on the current setup storage menu settings
Quick All Measurement	Display all the prompt message windows for all the measurement of the waveforms.
Quick Reset of Statistics	Quickly reset all the measurement statistics data and measurement counts
	Quickly reset all the statistics information in PassFail function
Quick Waveform Recording	Quickly start or stop the waveform recording.
Quick Email Sending	Quickly send the Email based on the set email address.
Quick Print	Quickly perform the print operation based on the current printer settings.
Quick Group Saving	Quickly perform the group saving function based on the currently selected item for saving.

Command Set

Command Set	
Common Commands Support	IEEE488.2 Standard
Error Message Definition	Error messages
Support Status Report Mechanism	Status reporting
Support Syn Mechanism	Synchronization

Display

Display	
LCD	10.1-inch capacitive multi-touch screen/gesture enabled operation
Resolution	1024×600 (Screen Region)
Graticule	(10 horizontal divisions) x (8 vertical divisions)
Persistence	Off, Infinite, variable persistence (100 ms to 10 s)
Brightness	256 intensity levels (LCD,HDMI)

I/O

I/O		
USB 2.0 Hi-speed Host Port	4 (3 on the front panel and 1 on the rear panel)	
USB 2.0 Hi-speed Device Port	1 on the rear panel, compatible with USB Test and Measurement Class (USBTMC)	
LAN	1 on the rear panel, 10/100/1000-port, supporting LXI-C	
GPIB	GPIB-USB adapter (option)	
Web Remote Control	Supported; VNC Web interface (input the IP address of the oscilloscope into the Web browser to display the operation interface of the oscilloscope)	
Aux Output	BNC output on the rear panel $V_o(H) \geq 2.5\text{ V}$ open circuit, $\geq 1.0\text{ V } 50\ \Omega$ to GND $V_o(L) \leq 0.7\text{ V}$ to load $\leq 4\text{ mA}$; $\leq 0.25\text{ V } 50\ \Omega$ to GND	
	Trig Out	Output a pulse signal when the oscilloscope is triggered
	Pass/Fail	Output a pulse signal when a pass/fail event occurs. Support user-defined pulse polarity and pulse time (100 ns~10 ms)
10 M In/Out	1 BNC connector on the rear panel	
	Support Mode	Disabling the output and input; when enabling the output (10 MHz output); when enabling the input (10 MHz input)
	Input Mode	50 Ω , with the amplitude 130 mVpp to 4.1 Vpp (-10 dBm, 20 dBm), the input accuracy 10 MHz $\pm 10\text{ ppm}$
Output Mode	50 Ω , 1.5 Vpp sine waveform	
HDMI Video Output	1 on the rear panel, HDMI 1.4b, A plug. used to connect to an external monitor or projector	
Probe Compensation Output	1 kHz, 3 Vpp square waveform	

Power Supply

Power Supply	
Power Voltage	100 V-240 V, 45 Hz-440 Hz
Power	Max. 200 W (connect to various interfaces, USB, and active probes)
Fuse	3.15 A, T degree, 250 V

Environment

Environmental Stress		
Temperature Range	Operating	0°C ~ +50°C
	Non-operating	-30°C ~ +70°C
Humidity Range	Operating	below +30°C: $\leq 90\%$ RH (without condensation)
		+30°C to +40°C, $\leq 75\%$ RH (without condensation)
	+40°C to +50°C, $\leq 45\%$ RH (without condensation)	
Non-operating	below 65°C: $\leq 90\%$ RH (without condensation)	

Altitude	Operating	below 3,000
	Non-operating	below 15,000

Note[1]: 2 GHz bandwidth is only applicable to single-channel or half-channel mode.

Note[2]: Half-channel mode: CH1 and CH2 are considered as a group; CH3 and CH4 are considered as another group. Each group share the same sample rate 5 GSa/s, and either one of the channels in each group is enabled.

Note[3]: Maximum value, single-channel, 10 ns horizontal time base, input amplitude 4 div, sine wave signal with 10 MHz frequency. Others are default settings.

Note[4]: 1 mV/div and 2 mV/div are a magnification of 4 mV/div setting. For vertical accuracy calculations, use full scale of 32 mV for 1 mV/div and 2 mV/div sensitivity setting.

Note[5]: You need to press **Acquire** → **More** → **Auto ROLL** to enable the ROLL mode.

Note[6]: Supporting legs and handle folded, knob height included, front protective cover excluded.

Note[7]: MSO8000 model, standard configuration.